


OASIS ULTRA

4.0

By Cigar Oasis

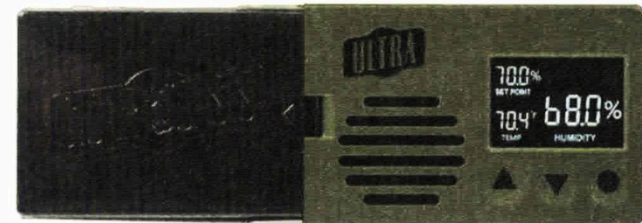


For warranty information go to www.cigaroasis.com



79 Heisser Court
Farmingdale, NY 11735
516.520.5258
www.cigaroasis.com

Cigar Oasis...the best in cigar humidification just got even better!

Included in the Box:

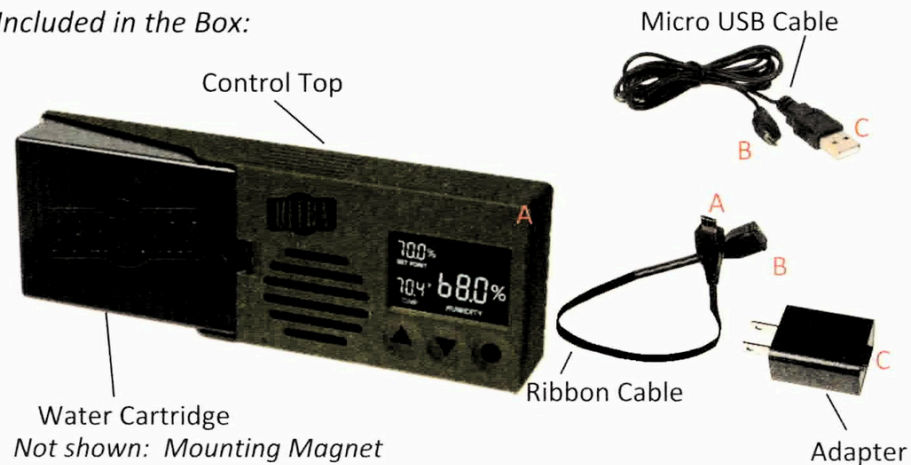

Water Cartridge
Not shown: Mounting Magnet



ASSEMBLY & STARTING YOUR CIGAR OASIS ULTRA 3.0

- 1) Remove all contents from the box and remove all plastic wrap and tape from the cartridge.
- 2) Put the **CIGAR OASIS ULTRA 4.0** together by lining up the tab on the cartridge with the slot near the ULTRA label on the unit. Connect the ribbon cable **A** to the port on the ULTRA unit **A**. The flat part of the ribbon cable will slide out the side of the humidor.
- 3) Connect the Ribbon Cable **B** to the Micro USB cable **B**.
- 4) Then connect **C** to the Adapter **C** and plug into an outlet.
- 5) Locate the water cartridge which is to be filled with **distilled water only** and follow instructions below.

Cartridge Refill Instructions

- 1) Fill a bowl with **distilled water only** and submerge the cartridge in it for 4 minutes.
- 2) Take the cartridge out and let it stand for another minute.
- 3) Empty all remaining water out of the cartridge so only damp foam remains. ****No water should drip out when the cartridge is held upside down****.
- 4) Dry off the cartridge and put the unit back together.

USING YOUR CIGAR OASIS ULTRA 4.0

- Once the unit is put together and plugged in, it turns on after a few seconds of powering up and then it will read the current humidity. The unit is factory preset at 70% humidity. As soon as the humidity drops below 70% the fan will come on to add moisture to the humidor.
- To raise or lower the humidity settings use the **UP** or **DOWN** arrows.
- When the unit needs to be refilled with distilled water, the **Low Water** and **Alert** icons will flash on display.  
- When the cartridge is refilled, and the unit gets to the set point the icons will shut off.

Change Temperature Between Fahrenheit and Celsius

- 1) Hold the **CIRCLE** button until the **F** or **C** starts flashing.
- 2) Press the **UP** arrow to select Celsius or Fahrenheit.
- 3) Hold the **CIRCLE** button down until **F** or **C** stop flashing to save the changes.

Calibrate Humidity

- 1) Hold the **CIRCLE** and **UP** arrow until the screen displays **U**.
- 2) Use the **UP** and **DOWN** arrows to raise or lower humidity +/- 9%.
- 3) Hold the **CIRCLE** and **UP** arrow to save the changes.

Wi-Fi Access with 30 Day Free Trial

For more information go to:

<https://www.cigaroasis.com/pages/smart-humidor>